

# PHITS

THE BEST SOUND FOR YOUR  
SPEAKER



Reduce the vibration of the cabinet  
Achieve a clear sound  
Enhance the frequency response


  
PHONEMA



## PHITS Y9K - Assembly Manual


### Preparing your SP-9000.

- Remove all the screws and take the speaker's top cover apart. Remove the filter plates and disconnect the cables that reach the board connectors. Withdraw the foam that covers the speakers and take the reeds that hold it apart. You will not need these pieces with Phits, but keep them safe anyway after removing them.

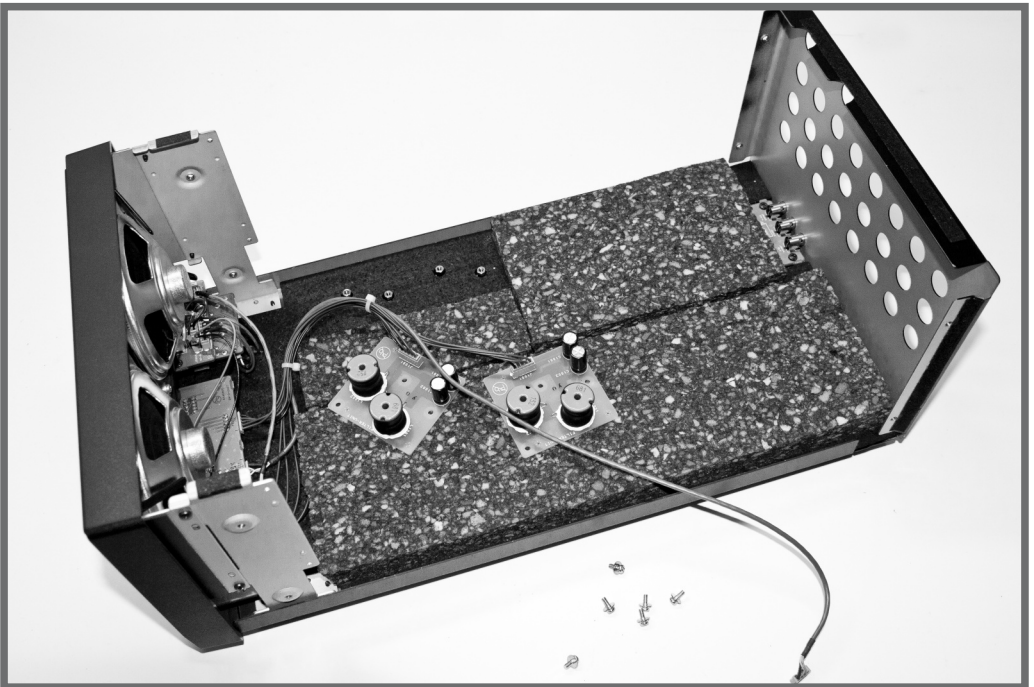


## First steps

- Place plate B making sure the holes match the nuts base. Taking the front cover apart might help you to place part B.
- Replace the filter plates and the cable connectors.
- Place plate BK at the back cover. All the plates are cut to fit between them.

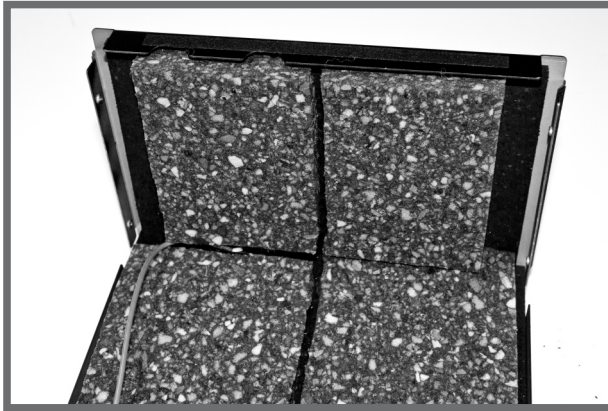


## Side panels

- Place plates L, C and R, in this order.
- Remove the SC foams stickers and place them as shown in the picture. One of them matches just behind the filter plates.

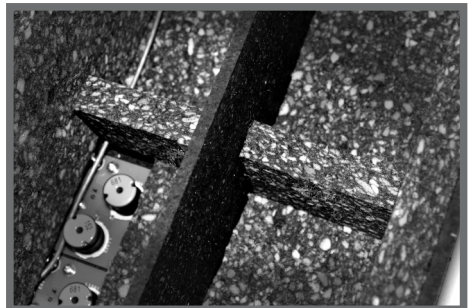


## Damping Fiber

- Fill in the inside with four-fifths of the Damping Fiber without reaching the back side.

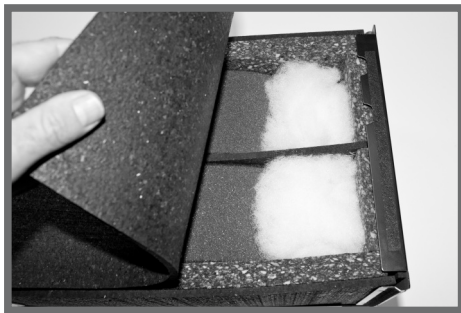

## Closing the enclosure.

- Place plate T as shown in the picture. The Acoustic Foam should draw an arc inside.
- Fill in the hole left behind with the remaining fiber. You should press firmly to fit in plate T with plate BK. It may be necessary to slightly loosen the screws that hold the back cover.
- Replace the front panel (in case you took it apart), the top cover and all the screws.

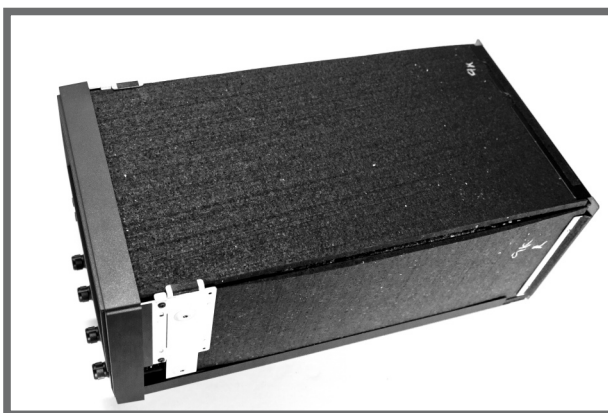

*\*Some pictures may vary from the original*